

# PRODUCT SPECIFICATION

## IMPRINT

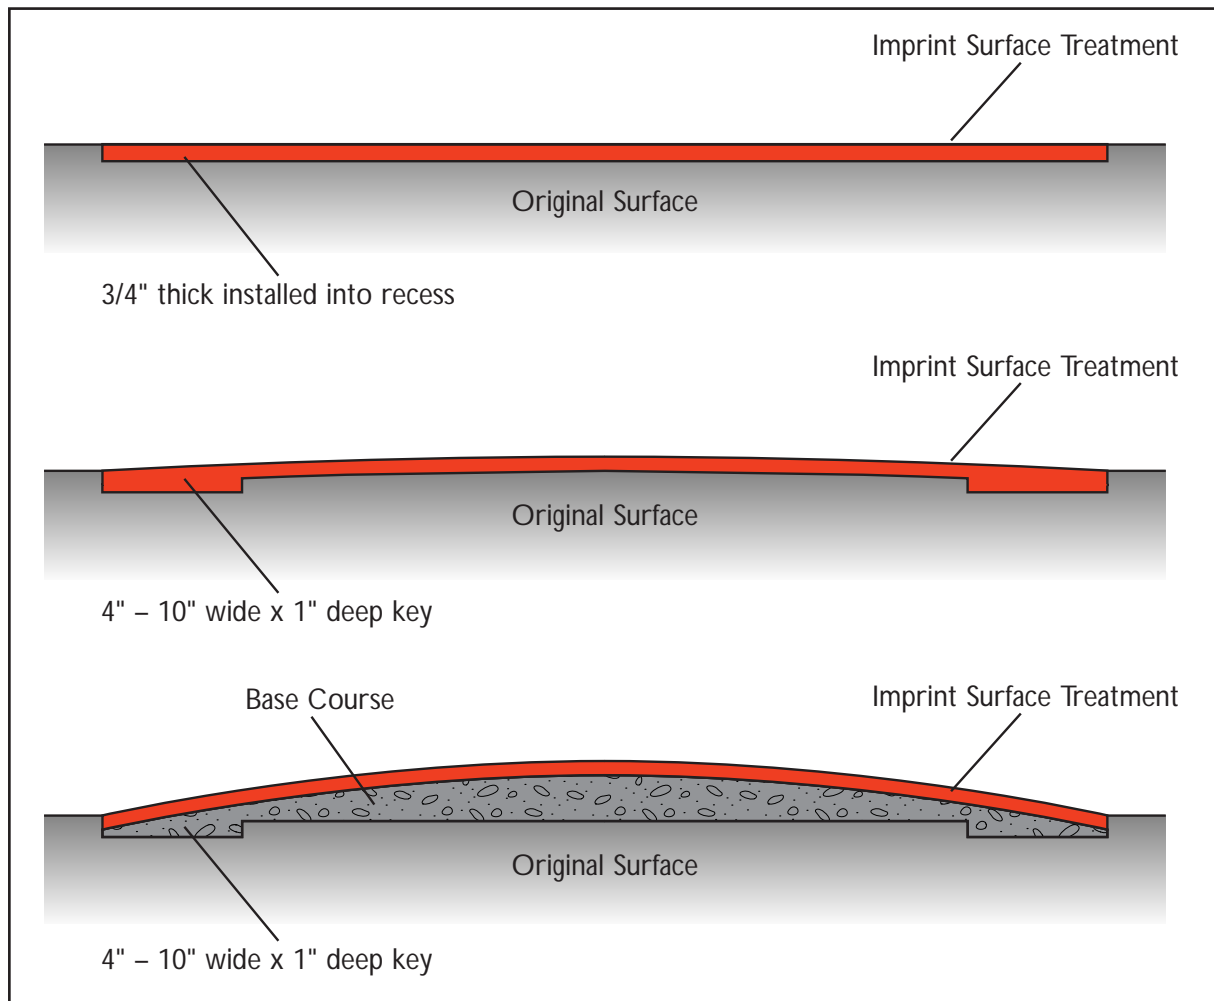


Table 1 – Imprint Properties

Grade	45 For use in Northern US/Canada – light/medium traffic in Southern USA	60 For use in rest of US states on heavily trafficked areas	70 For use in hot climate states
Av. Temperature range	5°F – 113°F	10°F – 140°F	32°F – 158°F
Wheel tracking at 113°F	<1mm/hour	<1mm/hour	<1mm/hour
Wheel tracking at 140°F	N/A	<5mm/hour	<10mm/hour (158°F)
Density	2.12	2.12	2.12
Cone Flow Test (5 hours @ 194°F)	15% maximum	15% maximum	10% maximum
Plane Test (5 hours @ 194°F)	5% maximum	5% maximum	5% maximum
Indent @ 104°F	25 dmm maximum	50 dmm maximum	N/A
Indent @ 122°F	N/A	75 dmm maximum	30 dmm maximum
Ash content	90% maximum	90% maximum	90% maximum